


**MFP STOCKING
LOCATIONS**



Troy, MI
84 MINNESOTA
TROY, MICHIGAN 48083
(248) 585-8170
FAX: (248) 585-4398
1-800-MFP-TROY
800-637-8769

ST. JOSEPH, MI
315 PALLADIUM DR.
ST. JOSEPH, MICHIGAN 49085
(269) 429-0824
FAX: (269) 429-0829
1-800-MFP-STJO
800-637-7856

HOUSTON, TX
6130 WESTVIEW
HOUSTON, TEXAS 77055
(713) 939-9990
FAX: (713) 939-9797
1-800-MFP-TEXS
800-637-8397

PHOENIX, AZ
SUITE 10
3767 E. BROADWAY RD.
PHOENIX, ARIZONA 85040
(602) 437-3220
FAX: (602) 437-3424
1-800-MFP-8988
800-637-8988


TAMPA, FL
5159 RIO VISTA AVE. W.
TAMPA, FLORIDA 33634
(813) 884-6777
FAX: (813) 884-6999
1-888-MFP-TMPA
888-637-8762

BOGOTA, COLOMBIA
CRA 72L No. 36-66 sur
BORRIO CARVALJAL
BOGOTA, COLOMBIA
(571) 418-9534

LINCOLN, ENGLAND
9, EVANS BUSINESS CENTERE
GATEWAY PARK
NEWARK ROAD, LINCOLN
LN6 9UH
United Kingdom
+44 (0)152 270 5158

Martin Fluid Power

X-PAC U-CUPS

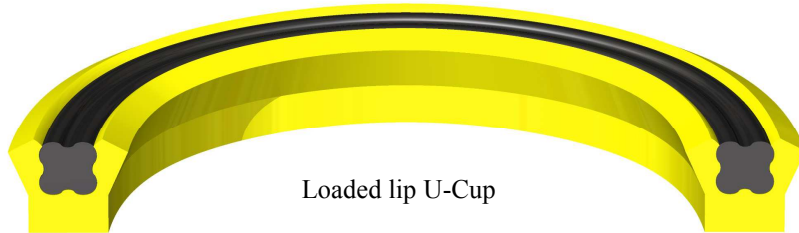

Loaded lip U-Cup

Ultraflex U245

Hardness, Durometer Shore A 95
Tensile Strength PSI 6,000
Ultimate Elongation, % 500
Compression Set, 18% 22 Hrs @ 73° F
Low Temp brittle Point <-90° F
Max Operating Temp 215°F



Made in USA

By Enhanced Polymers, Inc. a division of Martin Fluid Power

The above values are typical averages only.

Test information is based on specific conditions and limited sample size, and is only for general guidance. It does not supersede published data for the product. User must decide suitability for his purpose. Information applies at room temperature unless specified otherwise.

Copyright Martin Fluid Power Inc. 2009

Date: April 8, 2009

Revision: A

MFP X-PACs

www.mfpseals.com